

SPT1009

LIFT24[®]
EXCLUSIVE DISTRIBUTOR IN EUROPE



HENANS PTMACHINERY
EQUIPMENT CO., LTD.

Mini Crawler Crane (Spider Crane)

SPT Brand Spider Crane - Benchmarking
the World's Highest Standard

Intelligent, safe and more durable

SPT1009

LIFT24[®]
EXCLUSIVE DISTRIBUTOR IN EUROPE



Max lifting height 20.2m

Working radius 19m



Weight 11500kg

Capacity 10.0t×2.5m


SPT 1009

Working Range Diagram Without Fly Jib

SPT1009 Working Range Diagram

1009-11C

Weight: T

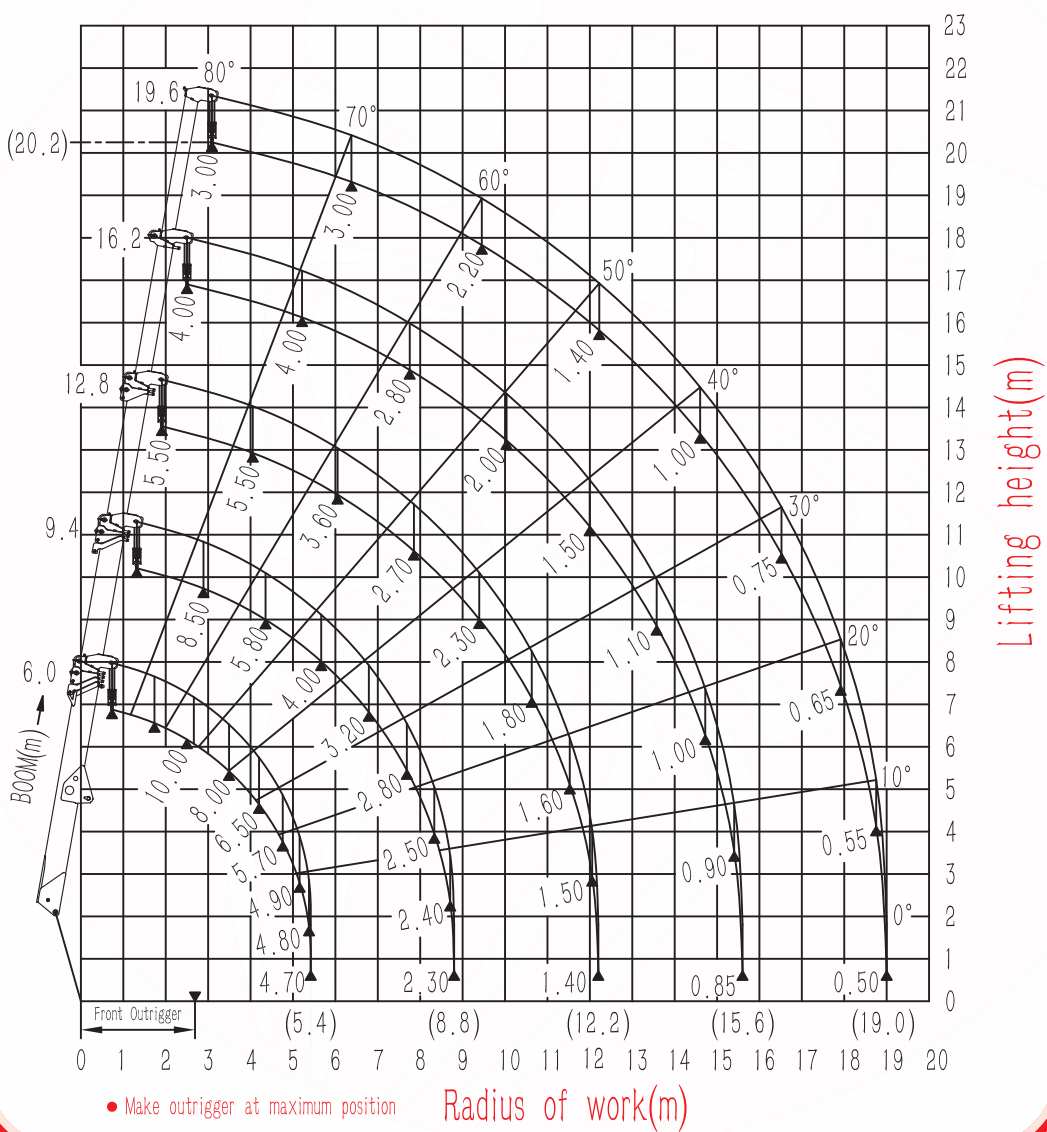


SPT1009


LIFT24[®]
EXCLUSIVE DISTRIBUTOR IN EUROPE



Outrigger Footprints

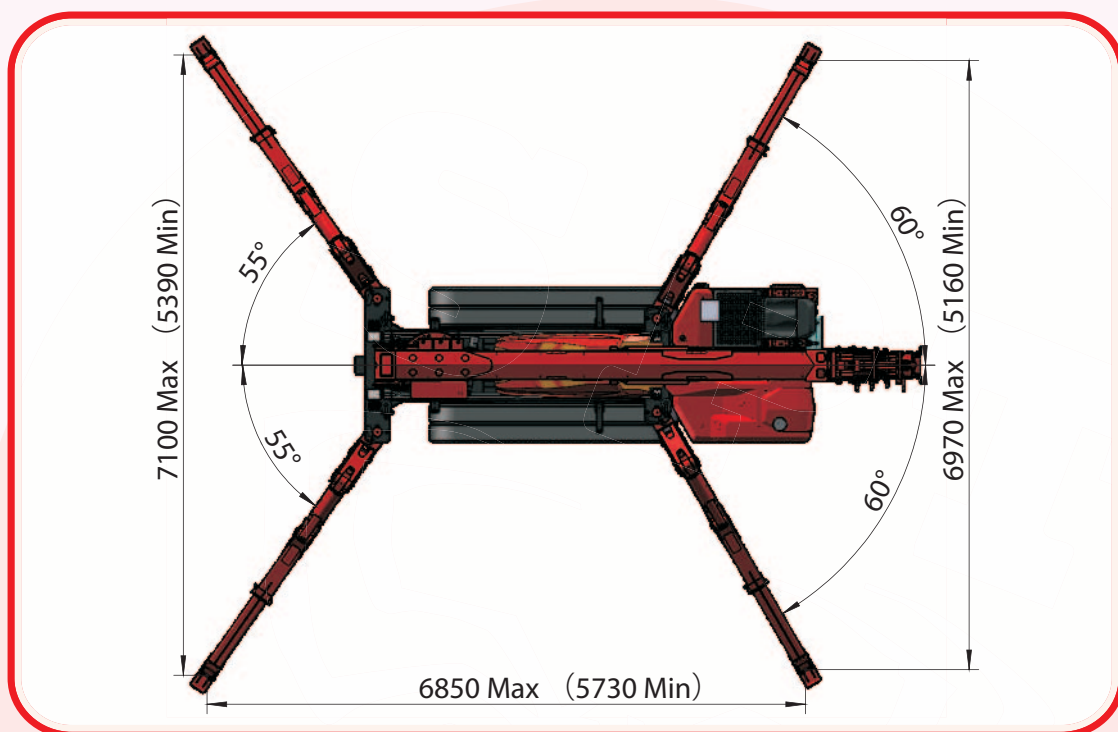

Dimensions

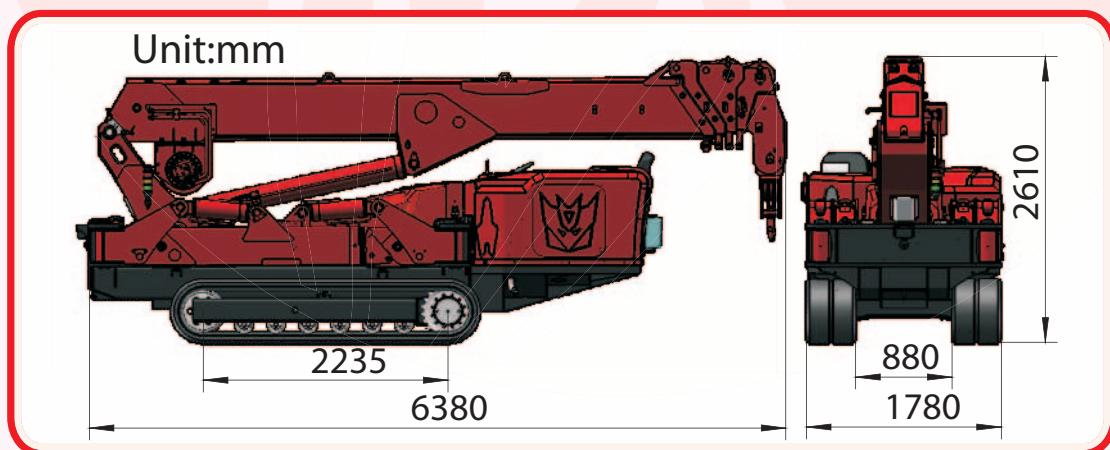

SPT1009

Specifications

Model		SPT1009
Capacity		10.0t×2.5m
Working radius		19m×0.50t
Ground lifting height		20.2m×3.0t
Underground lifting height		20m-6 fall 30m-4 fall 62m-2 fall 125m-1 fall
Winch device	Hook speed	0-12m/min （6 fall ） 0-18m/min （4 fall ）
	Rope type	Φ 10mm×150m
Telescopic system	Boom form	5 section boom, hexagonal box construction
	Boom length/Time	6.0m-19.6m/55sec
Up and downs	Boom angle/Time	0-80°/25sec
Slew system	Slew angle/Speed	0-360° （continuous） /60sec
Outrigger	Outrigger active form	Manual + Hydraulic
	Maximum extended dimensions （mm）	6850 （Length） X7100 （Front ） X6970 （Back ）
Traction system	Walking way	Hydraulic motor drive、 2 speed
	Walking speed	0-2.5km/ h
	Grade ability	23° （42%）
	Ground length×width	2235mm×400 mm
	Ground pressure	67kpa （0.68 kgf/cm²）
Electric motor	Voltage	AC380V （Optional）
	Power/Speed	15kw/1440 min-1
	Sound level	Rated speed ≤78dB(A) （1m）
Diesel engine	Model	4TNV88C （YANMAR ）
	Type/Displacement	4 Cylinder water cooled/2.19L
	Rated output	29.1kw/2400 min-1
	Starting method	Electric
	Operating temperature	-5℃~40℃
	Fuel/Volume	Diesel/60L
	Battery capacity	12v 60AH
	Specific fuel consumption	239g/kW-h
	Sound Level	Rated speed ≤92dB （A） （1m）
	Applied regulation/Altitude	EPA-Tier4, EC stage V/1200m
Operate system	Type of operation	Wireless remote control and Dual axis joystick controller
	Operating characteristic	Full proportional control
Dimension	Length×Width×Height	6380mm×1780mm×2610mm
Weight	（Without optional equipment ）	11500kg
Standard configuration	Diesel engine, Electric motor, Radio remote control, Searcher hook, Black rubber track , Intelligent display screen, Moment limiter, Over hoist alarm and automatic stop device, Three-winding alarm and automatic stop device, Automatic hook stow, Outrigger position detector device, Outrigger off the ground alarm and automatic stop device, Slinging rope detachment protector, EMO switch, Three color lamp, Remote control lamp, Voice prompt, Walking/Outrigger/Boom three- mode interlock system, Data records	
Optional configuration	Glass suction, White rubber track, Manual fly jib, Hydraulic fly jib, Single-man basket, Outrigger pads	

SPT1009

■ Total rated load Outriggers at Maximum position(4fall)

Working radius (m)	Total rated load (t)				
	6.00 boom	9.40boom	12.80boom	16.20boom	19.60boom
2.50	10.00	8.50	5.50	4.00	—
3.00	9.20	8.50	5.50	4.00	3.00
3.50	8.00	7.50	5.50	4.00	3.00
4.00	6.80	6.40	5.50	4.00	3.00
4.50	6.00	5.60	5.20	4.00	3.00
5.00	5.20	4.80	4.80	4.00	3.00
5.40	4.70	4.60	4.50	3.80	3.00
6.00		3.80	3.60	3.40	3.00
7.00		3.00	3.00	3.00	2.80
8.00		2.60	2.60	2.60	2.60
8.80		2.30	2.30	2.30	2.30
9.50			2.20	2.20	2.20
10.00			2.00	2.00	2.00
11.00			1.70	1.70	1.70
12.20			1.40	1.40	1.40
13.00				1.20	1.20
14.00				1.10	1.10
15.00				1.00	1.00
15.60				0.85	0.85
16.00					0.80
17.00					0.75
18.00					0.65
19.00					0.50